


INSTRUCTION SHEET
PRO Strip 25R
P/N 15028

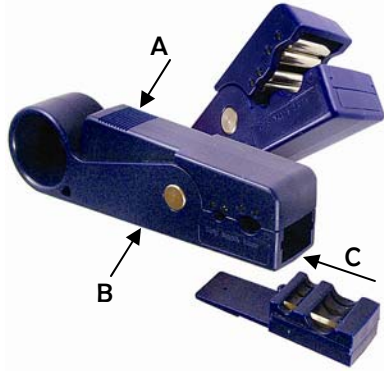

Instructions for use:

1. Open stripper jaws (A).
2. Select proper cable stripper location per cable size designated on side of tool
3. Insert coaxial cable from left to right.
4. Close the stripper jaws by releasing grip.
5. Rotate the stripper 3 to 6 times clockwise.
6. Keeping the jaws closed, pull both cable & stripper away from each other.
7. Open the jaws and clean out removed coax material.

**Replacing the Blade
Cartridge P/N 15029C**

1. On the underside of the stripper, push down and forward on the cartridge (B) to slide it out and finish removing it by hand.
2. Slide the new cartridge into the slot (C) until you hear it click into position.



Tel: 805-532-0145 Fax: 1-800-749-5784
Visit our web site at <http://www.platinumtools.com>